# Collated Screw 3.5 mm

for plasterboard


## DESCRIPTION

Collated screws, grey colored phosphate coating guarantees the vast corrosion resistance of the element.

Collated Drywall Screw TN 3.5, drywall screw for fixing plasterboards to metal profiles with metal thickness up to 0.7 mm.

Collated Self-Drilling Screw TB 3.5, self-drilling screw for fixing plasterboards to metal profiles with a metal thickness of up to 2 mm.

The screw is suitable for interior applications in premium drywall system solutions Technogips Pro .

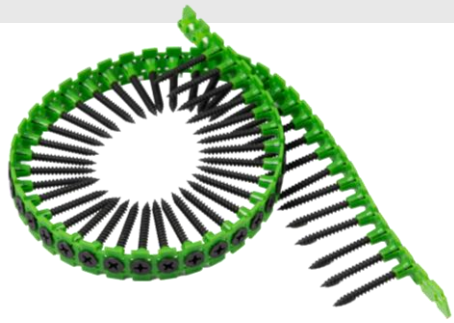



Collated Drywall Screw TN



Collated Self-Drilling Screw TB




## QUALITY GUARANTEE

CE 26

In compliance with **EN 14566:2008**

In compliance with **DIN 18182-2**

## TECHNICAL DATA

| | |
|---|---|
| Material | Carbon Steel |
| Coating | Grey Phosphate |
| Reaction to fire | A1 |
| Protection against corrosion | 48 hrs |
| Drilling time | < 2 sec. |
| Pull-out resistance | ≥ 450 N |
| Thread | Fine |
| Profile penetration | ≥ 10 mm |

## ADVANTAGES

- ✓ Needle point or self-drilling tip and fine thread for effortless drilling
- ✓ Fastening collated screws saves time and significantly increases work efficiency and productivity
- ✓ Unified belts are suitable for all types of collated screwdriver
- ✓ Phosphate coating for reliable and durable protection in case of short-term contact with moisture
- ✓ Countersunk head that sits flush creating smooth, clean, ready-to-finish surface

## SCREW LENGTH APPLICATION

| BOARD THICKNESS | FIRST LAYER | SECOND LAYER | THIRD LAYER |
|---|---|---|---|
| 9.5 mm | 3.5 x 25 | 3.5 x 35 | x |
| 12.5 mm | 3.5 x 25 | 3.5 x 35 | 3.5 x 55 |
| 15.0 mm | 3.5 x 25 | 3.5 x 45 | 3.5 x 55 |

FORMATT

2026©

# Collated Screw 3.5 mm

for plasterboard

## DIMENSIONS AND PACKAGING

| PRODUCT | DIAMETER (mm) | LENGTH (mm) | BIT | BOX (pcs) | BOXES IN CARTON (pcs) |
|---|---|---|---|---|---|
| Collated Drywall Screw TN 3.5 x 25 | 3.5 | 25 | PH 2 | 1000 | 10 |
| Collated Drywall Screw TN 3.5 x 35 | 3.5 | 35 | PH 2 | 1000 | 10 |
| Collated Drywall Screw TN 3.5 x 45 | 3.5 | 45 | PH 2 | 1000 | 6 |
| Collated Drywall Screw TN 3.5 x 55 | 3.5 | 55 | PH 2 | 1000 | 6 |
| Collated Self-Drilling Screw TB 3.5 x 25 | 3.5 | 25 | PH 2 | 1000 | 10 |
| Collated Self-Drilling Screw TB 3.5 x 35 | 3.5 | 35 | PH 2 | 1000 | 10 |

- ✓ Packaged in distinctive green Technogips Pro boxes
- ✓ Store in a dry, well-ventilated area.

## APPLICATION

Suitable for application in interior drywall construction systems Technogips Pro:

- ✓ Partition walls
- ✓ Wall linings
- ✓ Shaft walls
- ✓ Suspended ceilings
- ✓ And others



## SAFETY RECOMMENDATIONS

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro manufactures and develops a wide range of construction products for various applications divided into the following product categories:

- ✓ Drywall System Solutions;
- ✓ Lightweight Facade Systems;
- ✓ Systems for fire protection and sound insulation;
- ✓ Gypsum-based plasters and finishes;

Technogips Pro also provides various technical information such as CAD details, detailed technical statements, specification clauses, application manuals and technical support both for contractors and consultants' offices as well as construction sites visits. For further information on our products and systems kindly check our website or contact your local Technogips Pro representative.

**Formatt Building Products Ltd.**
**Office address**
Sofia 1404,
49B Bulgaria Blvd,
www.technogipspro.com
sales@technogipspro.com

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification.
2026©